

SAN 2000 87500000  
*Confidential*

SANDIA REPORT

UNCLASSIFIED

SANDIA - 0901 • Specified External Distribution Only\*

Printed May 1991

RECORD COPY  
DO NOT TAKE FROM THIS ROOM

*CONFIDENTIAL*

# Ice Penetration by Air Delivered Weapons (U)

DEPARTMENT OF ENERGY DECLASSIFICATION REVIEW	
1ST REVIEW DATE: 2-26-96	2. DETERMINATION (CIRCLE NUMBER(S))
AUTHORITY: CIAOC/DAIC/DAEB	1. CLASSIFICATION RETAINED
NAME: <i>Pat [unclear]</i>	2. CLASSIFICATION CHANGED TO:
2ND REVIEW DATE: 3/14/05	3. CONTAINS NO DOE CLASSIFIED INFO
AUTHORITY: ADP	4. COORDINATE WITH:
NAME: <i>Nancy Connelly</i>	5. CLASSIFICATION CAN:
	6. CLASSIFIED INFO BRACKETED
	7. OTHER (SPECIFY): <i>DOE CORRUPT</i>

M. M. Hightower, C. W. Young

*WAS with 5/8/07*

*with DOE (Cramer) brackets per ltr. dtd. 2/1/05 - there are no DOE Headquarters brackets.*

Prepared by Sandia National Laboratories Albuquerque, New Mexico 87185 and Livermore, California 94550 for the United States Department of Energy under Contract DE-AC04-76DP00789

Classified by L. T. James, Supervisor, Advanced Systems Development Division I, 1611, April 2, 1986

NATIONAL SECURITY INFORMATION Unauthorized disclosure subject to Administrative and Criminal Sanctions.

Derivatively Classified based upon OP-02 Arctic Classification Guide

Declassify on OADR

\*Only those recipients external to SNL as listed under "Distribution" are authorized to receive copies of this report. They are not authorized to further disseminate the information without permission from the originator.



SF 2900QA (8-81)

UNCLASSIFIED

*Confidential*

*95SA - R 000777*

~~CONFIDENTIAL~~  
UNCLASSIFIED

SAND84-0901  
SPECIFIED EXTERNAL DISTRIBUTION

ICE PENETRATION BY AIR DELIVERED WEAPONS (U)\*

M. M. Hightower & C. W. Young  
Advanced Systems Development I  
Division 1611  
Sandia National Laboratories\*\*  
Albuquerque, NM 87185

May 1986

ABSTRACT

Throughout history, there has been considerable interest in developing weapons to penetrate various targets. In recent years, the emphasis has been directed toward developing weapons which can penetrate hard targets such as rocks, concrete, and thick sea ice, and still function properly. In this report, an overview is presented of the important factors to consider when designing a weapon to penetrate thick sea ice. This discussion is based on both theoretical and experimental results of several programs conducted by Sandia on ice penetration. Additionally, the results of a recent Naval Air Systems Command (NAVAIR)-funded program to determine the ice penetration capability of several conventional air-delivered Naval weapons, including mines, torpedoes, and destructors will be presented.

\*This work was supported  
by NAVAIR.

\*\*A U.S. Department of  
Energy facility.

3  
~~CONFIDENTIAL~~  
UNCLASSIFIED

~~CONFIDENTIAL~~

UNCLASSIFIED

## I. WEAPON DESIGN CONSIDERATIONS FOR ICE PENETRATION

Several factors govern the design of an air-delivered, ice penetrating weapon, including: (1) ice type and thickness to be penetrated; (2) impact conditions; (3) release conditions; and (4) system constraints. These factors define the loading on a weapon and determine the mechanical complexity of the system. In this section, information on ice penetration requirements are presented, followed by a discussion on how the factors listed above affect ice penetration and their importance in the design of an optimum ice penetrating weapon within given system constraints.

### Ice Thickness Penetration Requirements

The term "sea ice" refers to several types of ice, each of which varies in age, thickness, and material properties. Sea ice can generally be divided into three categories. Based on age, they are: refrozen leads, annual ice, and multiyear ice. Refrozen leads occur when sections of ice separate, developing narrow channels or open water. These channels normally quickly freeze, giving rise to the name refrozen leads. Since the water is quickly frozen, the ice is relatively thin when compared to other ice types and contains a high concentration of brine, making it soft or weak.

Annual ice is ice which freezes and thaws each year. This ice is frozen slowly throughout the winter and therefore is stronger and contains a lower concentration of brine. Annual ice is typically five to seven feet thick but can be up to 10 feet thick during a severe winter.

Multiyear or pack ice lasts throughout the year, continuing to build up each year and becoming very thick. Pack ice is generally greater than 10 feet thick, and the partial thawing each summer and refreezing each winter tends to leach out the brine and eliminate voids, resulting in a very hard or strong ice.

~~CONFIDENTIAL~~

UNCLASSIFIED

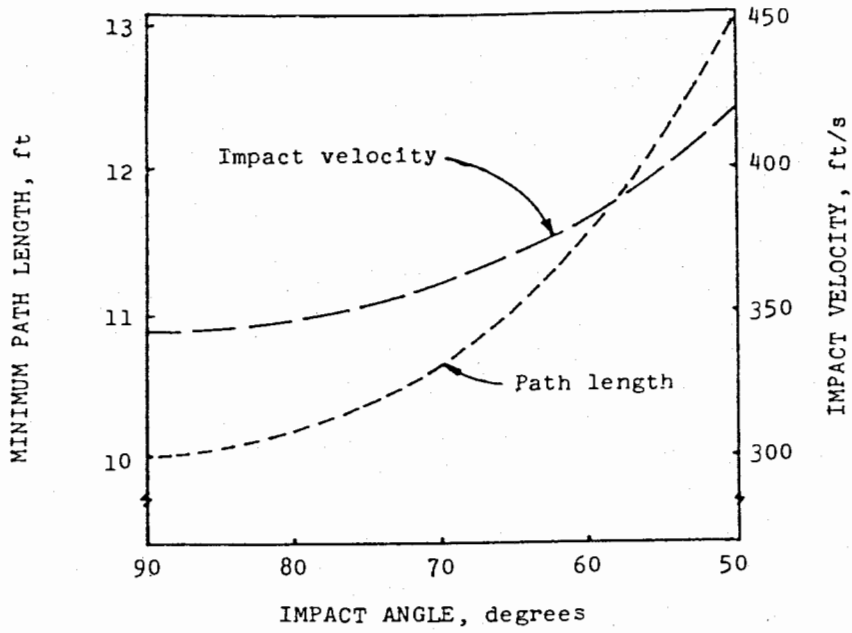


Figure 2. Velocity Required to Penetrate 10 feet of Ice at a Given Impact Angle for a 1500-lb System with a 2.2 CRH Nose

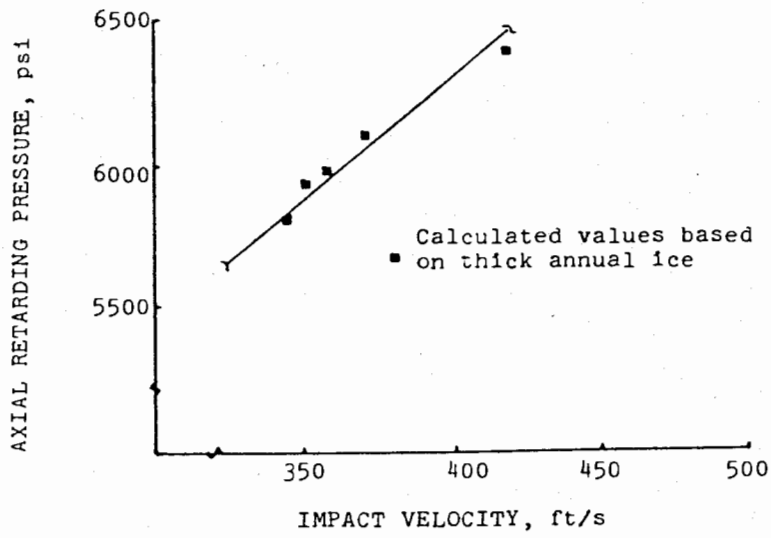


Figure 3. Axial Retarding Pressure on the Nose of a 15-inch Diameter System with a 2.2 CRH Nose at Various Impact Velocities

~~CONFIDENTIAL~~

UNCLASSIFIED

### Weapon System Constraints

On top of all the variables which must be considered when trying to design an ice penetrating weapon, there are several other constraints that must be placed on the weapon system. These constraints vary depending on the type of weapon, whether bottom mine, moored mine, torpedo, etc., the areas of the ocean in which they will be used, and the targets these weapons will engage. Practical constraints are also placed on these systems by the type of aircraft able to deliver them. These additional factors which have to be considered when developing an ice penetrating weapon system, including weapon type and use and aircraft constraints, are presented below.

### Weapon Use Constraints

In the previous section, it was illustrated how important it is to maintain selected impact velocities, impact angles, and angles of attack. Trying to maintain the most beneficial impact conditions may greatly increase the complexity of an ice penetrating weapon system because of the effectiveness constraints of a particular weapon. Ice penetrating weapon systems may be divided into two categories: target weapons and area weapons.

An area weapon, such as bottom or moored mines, would be used in a general area with many placed randomly throughout the area. Therefore, the CEP of a single weapon would not be important, and some scatter of the weapons could be tolerated. Figure 6 shows the release conditions required to enable a nonretarded 2.2 CRH, 1500-lb weapon system to impact at a minimum  $55^{\circ}$  impact angle at the velocities required to penetrate 10 feet of ice. As can be seen from this figure, release altitudes in excess of 2500 feet are required to attain the required impact velocity and impact angle. Some scatter would be expected if dropped from this height, but for general area weapons where the CEP is not important, a simple, aerodynamically-stable, free fall weapon system could attain an adequate impact velocity and impact angle.

~~CONFIDENTIAL~~

UNCLASSIFIED

~~CONFIDENTIAL~~

UNCLASSIFIED

A target weapon, such as destructors and torpedoes, is used against a specific target and therefore needs to be delivered with a generally small CEP. This would probably require either a low-level delivery to prevent scatter or a guided weapon system. A guided weapon system can be very complicated, while low-level deliveries do not generally provide acceptable impact velocities and impact angles for ice penetration in either free-fall or retarded configurations. Low-level deliveries would probably require that a weapon system be retarded to attain the required impact angles and then be boosted to attain the required impact velocities. Therefore, either a guided or low-level delivery of a target weapon could substantially increase the complexity of an ice penetrating system in order to meet survivable impact conditions.

Aircraft Constraints

The two systems suggested for delivery of ice penetrating weapons are the P3 and B52 aircraft which have practical system constraints as listed in Table 2. [7,8].

Table II. Practical Delivery System Constraints for Ice Penetrating Weapons

<u>SYSTEM</u>	<u>PRACTICAL SYSTEM CONSTRAINTS</u>			
	<u>Number of Weapons</u>	<u>Weight (lbs)</u>	<u>Diameter (inches)</u>	<u>Length (inches)</u>
B52 (Bomb Bay) (2 Clip System)	8-12	2500	24	150
B52 (Wing Pylon) (Each Wing)	5	2500	24	150
P3 (Bomb Bay)	3	1600	21	133
P3 (Bomb Bay)	1	2450	23-5/8	133
P3 (Wing Stations)	6	2450	--	--

~~CONFIDENTIAL~~

UNCLASSIFIED

~~CONFIDENTIAL~~ UNCLASSIFIED

14. Longcope, D. B., and Foresstal, M. J., "Penetration of Targets Described by a Mohr-Coulomb Failure Criterion with a Tension Cutoff, Journal of Applied Mechanics, Vol. 50, June 1983, pp. 327-333.
15. Young, C. W., and Young, E. R., "Simplified Analytical Model of Penetration with Lateral Loading, SAND 84-1635, Sandia National Laboratories, Albuquerque, NM, May 1985.

47  
~~CONFIDENTIAL~~ UNCLASSIFIED

~~SECRET~~

UNCLASSIFIED

Sandia National Laboratories

Albuquerque, New Mexico 87185

October 5, 1983

#CA-1890  
Commander  
Naval Weapons Center  
Code 822  
China Lake, CA 93555  
Attn: C. B. Knox  
M. L. Mullins  
E. Q. Paine  
For: Floyd Smith, Code 326

#MB-1762  
Commander  
Naval Surface Weapons Center  
White Oak Laboratory  
Silver Spring, MD 20910  
Attn: R. A. Barker, Librarian  
For: M. M. Kleinerman, Rm. 20-223

Subject: Load/Time Histories for Mk-82, -83, and -84 Bomb  
Shapes Penetrating 10 Feet of Ice (U)

Gentlemen:

Under Sandia National Laboratories' contract with the Naval Air Systems Command to determine the ice penetration capability of several of the Navy's conventional mines, torpedoes, and destructors, we have calculated the axial and lateral loading environments for those weapons which will structurally survive 10 feet of ice penetration. Under this agreement, we are to provide this data to the appropriate Naval laboratories so that they can analyze

Done  
b(1)

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED

DATE 9/26/83 BY [signature]

CMDR Hickman NAVAIR x  
Wash., DC

OP-02 (Arctic Classification Guide)

Originally Classified Reason:

~~SECRET~~

UNCLASSIFIED



*SECRET*

Table 1.

NAVAIR P3 Aircraft Compatibility System Constraints

SYSTEM CONSTRAINTS

<u>SYSTEM TYPE</u>	<u>Weight (lbs)</u>	<u>Diameter (inches)</u>	<u>Length (inches)</u>
1	1200	14	134
2	1600	21	133
3	2450	23-5/8	133
4	2450	--	---

to try and make these modifications fall within the constraints of either Systems 1 or 2. In this report, the modifications required for ice penetration and the expected loading environments for the following weapons will be addressed: Mk-65 Quick-strike, Mk-60 Captor, Mk-56 moored mine, and Mk-55 and Mk-52 bottom mines. The modifications required for ice penetration and the loading environments expected were presented in [2] for the Mk-82, -83, and -84 bomb shapes and in [3] for the Mk-46 and ALWT torpedoes.

The loading information calculated for each of the weapons which could be modified within the constraints listed in Table 1 include:

- Axial acceleration/time
- Lateral acceleration/time
- Lateral forces/time

*SECRET*

~~CONFIDENTIAL~~

UNCLASSIFIED

DOE

-12-

References:

- [1] CNSI Letter dtd 9-26-83, M. M. Hightower, SNLA, to CMDR H. W. Hickman, NAVAIR, subj: "Progress Report for September on SNL's Ice Penetration Study" (U)
- [2] CNSI Letter dtd 10-5-83, M. M. Hightower, SNLA, to M. M. Kleinerman, NSWC, and F. Smith, NWC, subj: "Load/Time Histories for Mk-82, -83, and -84 Bomb Shapes Penetrating 10 Feet of Ice" (U)
- [3] CNSI Letter dtd 10-14-83, M. M. Hightower, SNLA, to CMDR H. W. Hickman, NAVAIR, subj: "Ice Penetration Study" (U)
- [4] Forrestal, M. J., "Forces on Conical-Nosed Penetrators Into Targets With Constant Shear Strength," (U), Mechanics of Materials 2, pp. 173-177, 1983.
- [5] Hightower, M. M.; Norwood, F. R.; and Young, C. W., "Development of an Ice Penetration Model," (U) Report SAND82-0599, Sandia National Laboratories, Albuquerque, NM, December 1982.
- [6] Letter dtd 3-7-77, C. W. Young, SNLA, to M. M. Kleinerman, NSWC, subj: "Mk-82 and Mk-65 Quickstrike Penetration Tests at White Sands Missile Range" (U)

UNCLASSIFIED

-107-

~~CONFIDENTIAL~~

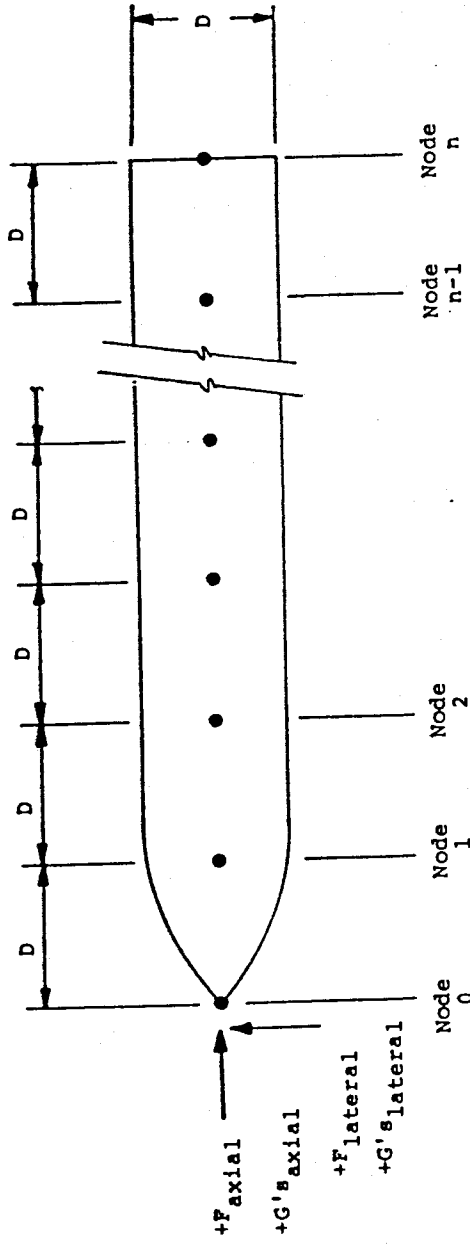


Figure 1. Location of nodes for the lateral loading plots.

~~CONFIDENTIAL~~

UNCLASSIFIED

-2-

Table 1.

NAVAIR P3 Aircraft Compatibility System Constraints

SYSTEM CONSTRAINTS

<u>SYSTEM TYPE</u>	<u>Weight (lbs)</u>	<u>Diameter (inches)</u>	<u>Length (inches)</u>
1	1200	14	134
2	1600	21	133
3	2450	23-5/8	133
4	2450	--	---

This preliminary report considers only possible modifications to the Mk-46 and ALWT torpedoes.

DOE

-141-

~~CONFIDENTIAL~~

UNCLASSIFIED

*Ames*

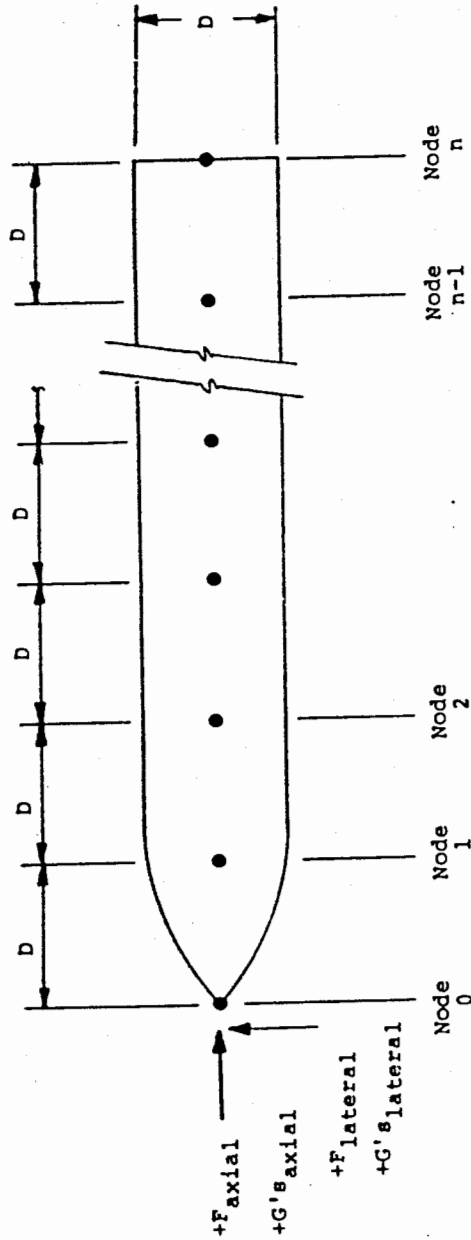


Figure 1. Location of nodes for the lateral loading plots.

*Ames*

~~SECRET~~ UNCLASSIFIED

SPECIFIED EXTERNAL DISTRIBUTION:

PA-4948 Commander  
Naval Air Development Center  
Attn: Peter Van Schuyler (2)  
Warminster, PA 18974-5000 (2)

ME-4887 Honeywell, Inc.  
Attn: T. Palomaki  
B. Aanerud  
For: Jeff Hammer, MS-MN11-2360  
600 2nd Street N.E.  
Hopkins, MN 55343

NE-0737 Los Alamos National Laboratory  
Mail Station 5000  
Attn: Larkin Garcia, MS/F601  
P. O. Box 1663  
Los Alamos, NM 87545

CA-0800 Sandia National Laboratories  
Attn: Document Control  
For: J. C. Swearengen  
R. N. Everett  
R. E. Rychnovsky  
P. O. Box 969  
Livermore, CA 94550

CA-0828 University of California  
Lawrence Livermore National Laboratory  
Attn: Stan Erickson, L-83  
P. O. Box 808  
Livermore, CA 94550

333 J. F. Arfman  
333 R. L. Woodfin (2)  
1611 C. W. Young (2)  
1611 M. M. Hightower (15)  
1611 L. T. James  
3141 S. Landenberger (5)  
3151 W. C. Garner (3)  
8024 A. W. Dean (1)

-171-  
~~SECRET~~ UNCLASSIFIED